
IIT Patna measurement pending - conceptual apparatus, not as-built

(a) Proposed water/saline rig

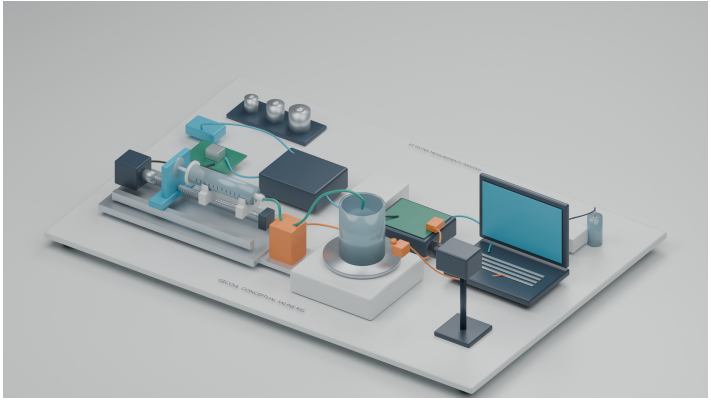

Syringe/drive; supported outlet; receiver/balance
Separate temperature vial; reference masses;
proposed camera/time marker and logger

Commands, acknowledgments and received reports
are logged separately from measured outlet delivery.

(b) Required measurement chain

1 Defined outlet + observation interval
Physical measurand; fluid and boundary specified

↓

2 Signed native balance indication
Preserve signs, native clocks and instrument status

↓

3 Validated reconstruction - PENDING
Corrected outlet mass/volume with uncertainty

Requires reference-method, no-flow/low-flow,
density and synchronization validation (M01-M16).

Only then: a defensible virtual-patient input.

Balance or camera alone is not ground truth.